


PCAN-MicroMod Mix 2

Application-specific PCAN-MicroMod
Motherboard

User Manual

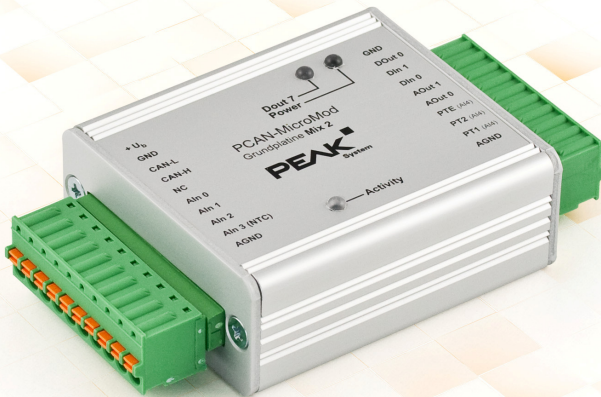

Products taken into account

Product Name	Model	Part number
PCAN-MicroMod Mix 2	Including casing and PCAN-MicroMod	IPEH-002203
PCAN-MicroMod Configuration	Version 2.5 (Windows software)	

CANopen® and CiA® are registered community trade marks of CAN in Automation e.V.

All other product names mentioned in this document may be the trademarks or registered trademarks of their respective companies. They are not explicitly marked by "™" and "®".

© 2014 PEAK-System Technik GmbH

PEAK-System Technik GmbH
Otto-Roehm-Strasse 69
64293 Darmstadt
Germany

Phone: +49 (0)6151 8173-20
Fax: +49 (0)6151 8173-29

www.peak-system.com
info@peak-system.com

Document version 1.11.1 (2014-03-11)

Contents

1	Introduction	4
1.1	Properties at a Glance	4
1.2	Prerequisites for Operation	6
1.3	Scope of Supply	6
2	Hardware Configuration	7
2.1	Pull-up/Pull-down Circuits for the Digital Inputs	8
2.2	Measuring Range Extension of the Analog Inputs	9
2.3	Using a PT1000 with Three-Wire Connection	10
3	Operation	11
3.1	Port Assignment	11
3.2	Configuration Program	12
3.2.1	System Prerequisites	12
3.2.2	Installing the Program	13
3.2.3	Creating a Configuration	13
3.2.4	Applicable MicroMod Services	14
3.2.5	Relation Temperature/Digits	16
3.3	Status LEDs	17
3.4	Several MicroMods on the CAN Bus	17
4	Technical Specifications	19
	Appendix A CE Certificate	22
	Appendix B Dimension Drawing	23

1 Introduction

The motherboards for PCAN-MicroMod provide an application-oriented environment. Typical characteristics of this product group include a wide supply voltage range and the protective circuit for the inputs and outputs. CANopen® firmware is available for all PCAN-MicroMod motherboards.

The Mix 2 motherboard serves common analog and digital requirements and supports temperature measurement.



Note: This manual only refers to the motherboard as base for a PCAN-MicroMod and to the standard firmware. For the PCAN-MicroMod and the configuration program PCAN-MicroMod Configuration, there is separate documentation.

1.1 Properties at a Glance

- Completely configurable using the Windows program PCAN-MicroMod Configuration
- Communication through High-speed CAN (ISO 11898-2)
- Operating voltage 11 to 26 V (8 to 26 V w/o use of analog outputs)
- Aluminum profile casing with spring terminal connectors
- Top hat rail mounting option available
- Extended operating temperature range from -40 to +85 °C (-40 to +185 °F)

- └ 2 digital inputs:
 - Pull-up or pull-down circuit selectable (for both together)
 - High state at 5 to 18 V input voltage
 - Schmitt trigger behavior, inverting
 - Low-pass behavior
 - Parallel connection of a frequency input for alternative use (e.g. fast status changes, countings)
- └ 2 inputs for connecting a thermistor and a platinum sensor PT1000, measuring range each 0 to 70 °C (32 to 158 °F)
- └ 3 analog inputs:
 - Pull-down circuit
 - Measuring range unipolar 0 to 4.1 V
 - Resolution 10 bits
 - Sampling rate 1 kHz
 - Measuring range extension possible
 - Low-pass behavior
 - Protection against undervoltage and overvoltage
- └ 1 digital output:
 - Fast low-side switch, max. 55 V, 0.75 A
 - Short circuit protection
- └ 1 analog voltage output:
 - Voltage range 0 to 10 V (based on 16-bit PWM)
 - Load ability: 15 mA, short-circuit proof
- └ 1 analog current output with 0 to 20 mA (based on 16-bit PWM)
- └ Status LEDs for power supply and digital output

1.2 Prerequisites for Operation

- └ Power supply in the range of 11 to 26 V DC (8 to 26 V w/o use of analog outputs)
- └ For creating and transferring configurations: computer with Windows 8, 7, Vista, XP (32-bit or 64-bit) and a CAN interface from the PCAN series

1.3 Scope of Supply

- └ PCAN-MicroMod
- └ PCAN-MicroMod motherboard in casing including mating connectors
- └ PCAN-MicroMod Configuration for Windows
- └ Manual in PDF format

2 Hardware Configuration

You can customize the motherboard by modifying the hardware. The following subsections contain descriptions about possible modifications.

Accessing the Motherboard

In order to carry out the modifications described in the following sections, unscrew the lid of the casing and pull off the MicroMod from the motherboard.



Attention! Electrostatic discharge (ESD) can damage or destroy components on the motherboard or the PCAN-MicroMod. Take precautions to avoid ESD when handling the boards.

Remounting the MicroMod

When you remount the MicroMod, take notice of the white triangular marks on each the motherboard and the MicroMod (upper left corner). These marks must align.




Figure 1: Positioning of the MicroMod

2.1 Pull-up/Pull-down Circuits for the Digital Inputs

At delivery the digital inputs are set to pull-up circuits. You can set them together to pull-down circuit. This is done by repositioning a 0-Ohm resistor.

Digital inputs	Pull-up (+U _b)*	Pull-down (GND)
DI 0 and DI 1	R73 (0 Ω)	R74 (0 Ω)

* Setting at delivery

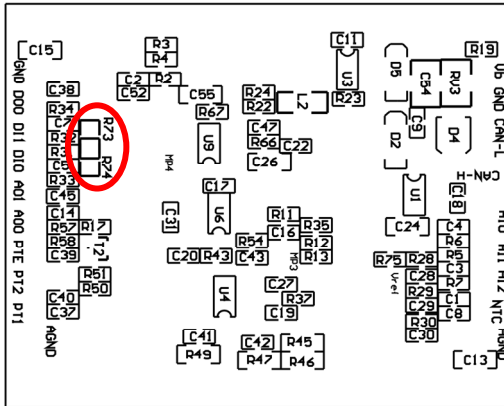


Figure 2: Position R73/R74 (bottom side of the PCB)



Attention! Double-check for an inadvertent short circuit after altering the setup.

2.2 Measuring Range Extension of the Analog Inputs

You can extend the measuring range of each analog input to a higher maximum voltage than 4.1 Volts by using a voltage divider. On delivery of the motherboard the resistor positions R28 to R30 on the bottom side of the PCB are not equipped. By inserting a resistor R_x with a value calculated with the following formula the measuring range is extended to the desired maximum voltage U_{MB} .

$$R_x = \frac{2400 \Omega}{\frac{U_{MB}}{4.1V} - 1} \quad (U_{MB} > 4.1V)$$

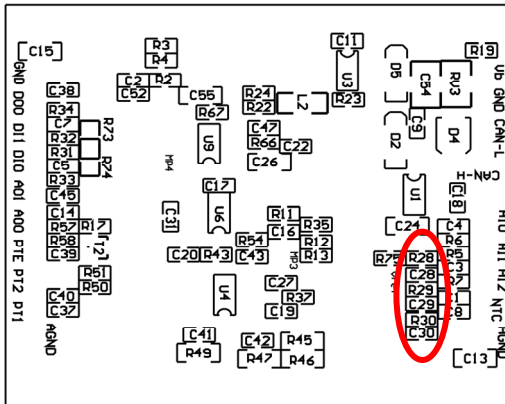


Figure 3: Position R28 to R30 (bottom side of the PCB)

2.3 Using a PT1000 with Three-Wire Connection

At delivery the Mix 2 motherboard is configured to be used with a PT1000 thermistor with two-wire connection. If you would like to use a PT1000 with three-wire connection instead (e.g. in case of a long connection cable), you must remove the 0-Ohm resistor on the PCB located on position R76.

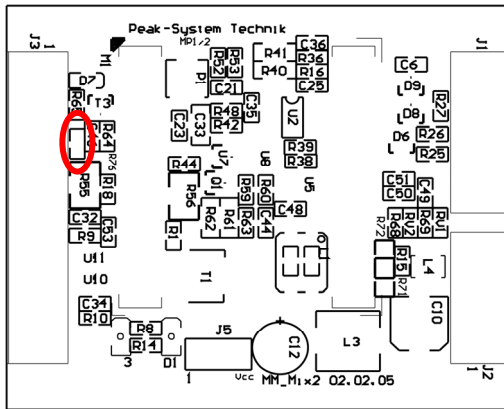


Figure 4: Position R76

3 operation

3.1 Port Assignment

The motherboard has two connectors, J1/2 on the left and J3 on the right. The port assignment is as follows:

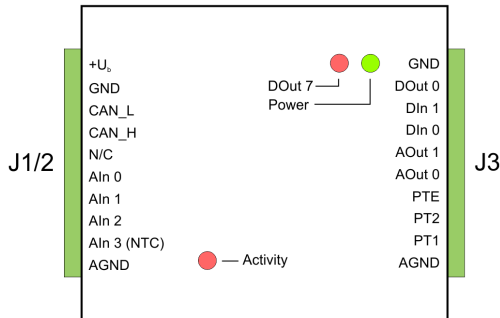


Figure 5: Ports of the Mix 2 motherboard

Port name J1/2	Function
+U _b	Operating voltage 11 - 26 V DC, w/o AOut 8 - 26 V DC
GND	Digital ground
CAN _L	Differential CAN signal
CAN _H	
N/C	Not connected
AIn 0	Analog input
AIn 1	
AIn 2	
AIn 3 (NTC)	Connection thermistor (against AGND)
AGND	Analog ground

Port name J3	Function	
GND	Digital ground	
DOut 0	Digital output	
DIn 1	Digital input	
DIn 0		
AOut 1	Analog output for current (PWM)	
AOut 0	Analog output for voltage (PWM)	
PTE	Temperature measurement PT1000	Reference point
PT2		Input
PT1		Input
AGND	Analog ground	

3.2 Configuration Program

In order to create and transfer MicroMod configurations the Windows software PCAN-MicroMod Configuration is used. This section covers basic points about installation and use of the program with the Mix 2 motherboard.

You'll find detailed information about the use of PCAN-MicroMod Configuration in the related documentation which is invoked via the program (e.g. with **F1**).

3.2.1 System Prerequisites

- Windows 8, 7, Vista, XP (32-bit or 64-bit)
- Computer with CAN interface of the PCAN series (for transferring a configuration to the PCAN-MicroMod via CAN)

3.2.2 Installing the Program

Under Windows install the program from the supplied CD. Start the corresponding installation routine by using the CD navigation going to **Tools > PCAN-MicroMod Configuration 2.5.x**.

3.2.3 Creating a Configuration

When you start creating a new configuration in PCAN-MicroMod Configuration, the dialog box Board Type appears in order to select the type of the used motherboard. The necessary settings are explained in the following.

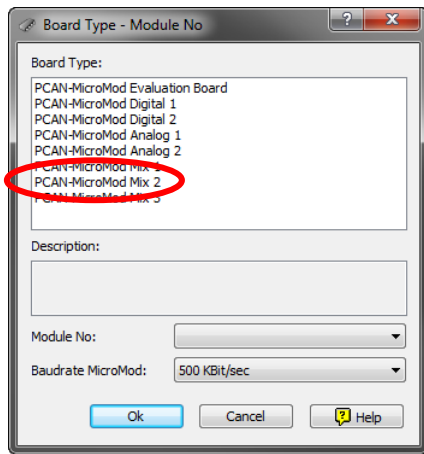


Figure 6: PCAN-MicroMod Configuration: selection of the Mix 2 motherboard


Board Type: PCAN-MicroMod Mix 2

Module No: 0

The module number of the MicroMod on the Mix 2 motherboard is set to 0 at delivery and is relevant if you want to configure more than one MicroMod on the same CAN bus. See also section 3.4 *Several MicroMods on the CAN Bus* on page 17.













Bitrate MicroMod: 500 kbit/s




At delivery the MicroMod is set to a bit rate of 500 kbit/s. A change of this setting will take effect after sending the completed configuration to the MicroMod.

 **Note:** For the first transfer of a configuration to the module it must be integrated in a CAN network with a bit rate of 500 kbit/s.

3.2.4 Applicable MicroMod Services

The motherboard's inputs and outputs are controlled by the services of the MicroMod. The following table shows the assignment of the motherboard functions to the MicroMod services.

Function on motherboard	Port name	Access with MicroMod service(s)
Digital input	DIn 0, DIn 1	 Digital Input
		 Digital Function
		 Rotary Encoder
Frequency input (parallel to channels DIn 0 and DIn 1)		 Frequency Input
Digital output (higher-frequency state changes are not possible)	DOut 0	 Digital Output
Temperature measurement thermistor (see also table in section 3.2.5 on page 16)	Aln 3 (NTC)	 Analog Input
		 Curve
Temperature measurement PT1000	PTx	 Analog Input
		 Curve
Analog input (see also table in section 3.2.5 on page 16)	Aln 2, Aln 3	 Analog Input
		 Curve
		 Analog Hysteresis

Function on motherboard	Port name	Access with MicroMod service(s)
Analog output for voltage	AOut 0	 PWM and Frequency Output (4 kHz recommended for PWM)
Analog output for current (inverting)	AOut 1	 PWM and Frequency Output (4 kHz recommended for PWM)
LED DOut 7	DOut 7	 Digital Output

3.2.5 Relation Temperature/Digits

Since the NTC thermistor does not provide a linear correlation between temperature and the resulting voltage, the use of interpolation values can be expedient. With these values you can create a mapping curve with the corresponding MicroMod service. For the PT1000 this procedure is not necessarily needed, because it works almost linear in the defined temperature range.

The following table provides the mapping between a temperature and the resulting voltage or the digits respectively.

Temperature (°C)	Digits* NTC	Digits* PT1000
0	1023	2
2	1010	36
5	974	89
10	911	164
15	841	235
20	765	310
25	683	380
30	602	455
35	516	524
40	432	598
45	348	668
50	268	742
55	192	812
60	121	886
65	57	956
70	3	1023

* 1 digit \equiv 4 mV

3.3 Status LEDs

The motherboard including the MicroMod has three LEDs with the following status indications:

LED	Indication
Power (green)	Power is applied.
DOut 7 (red)	Is linked to the digital output DO 7 of the MicroMod and can be configured freely.
Activity (red)	Status of the PCAN-MicroMod:
blinking at 1 Hz	normal operation
blinking at 2 Hz	invalid or no configuration
blinking at 5 Hz	configuration mode
continuously on	internal MicroMod error

3.4 Several MicroMods on the CAN Bus

If you want to use several MicroMods on the same CAN bus and want to configure them, each one needs its own module number. That way the MicroMods are distinguishable for the program PCAN-MicroMod Configuration.

The module number is set on the MicroMod by solder jumpers and lies in the range of 0 to 31. At **delivery** each MicroMod has the **module number 0**.

During normal operation of the PCAN-MicroMod, the module number has no effect on the CAN communication.

For setting the solder jumpers on the MicroMod unscrew the top of the casing and remove the MicroMod from the motherboard. Please find further information about the assignment of module numbers in the separate manual for the PCAN-MicroMod.



Attention! Electrostatic discharge (ESD) can damage or destroy components on the motherboard or the PCAN-MicroMod. Take precautions to avoid ESD when handling the boards.

Remounting the MicroMod

When you remount the MicroMod, take notice of the white triangular marks on each the motherboard and the MicroMod (upper left corner). These marks must align.




Figure 7: Positioning of the MicroMod

4 Technical specifications

Power supply

Operating voltage +U _b	11 - 26 V DC ($\pm 5\%$), 8 - 26 V w/o AOut
Current consumption	max. 200 mA, typ. 35 mA at 12 V w/o load
Overvoltage protection	± 30 V static, ± 500 V surge
Ripple 5 V	< 50 mV (+U _b = 12 V, 200 mA load)
Ripple analog	< 20 mV
Reverse-polarity protection	extant; can get ineffective by the wiring with other CAN nodes (danger of destruction of electronic components)

Analog inputs

Count	3
Measuring range	0 to 4.1 V, extendable
Resolution	10 bits
Sampling rate	1 kHz
Source impedance	< 5 k Ω
Overvoltage protection	extant
Low-pass	f _g = 66 Hz

Analog outputs

Count	2
Type	PWM based
Voltage AOut 0	0 - 10 V
Resolution	16 bits
Load ability AOut 0	15 mA
Current AOut 1	0 to 20 mA (inverting)
Load resistance AOut 1	< 100 Ω

Temperature input thermistor

Count	1
Reference sensor type	Thermistor EC95F103W (e.g. RS Components part no. 151-237, form factor: bead) ¹
Measuring range	0 to 70 °C (32 to 158 °F) corresponding 4.1 to 0 V (antiproportional) ¹
Resolution	±1.0 °C (due to sensor)

Temperature input PT1000

Count	1
Sensor type	PT1000, two- or three-wire connection
Measuring range	0 to 70 °C (32 to 158 °F) corresponding 0 to 4.1 V
Resolution	10 bit
Resolution	±0,5 °C

Digital inputs

Count	2
Switching thresholds	UIH = 4 V; UIL = 3 V, contact or logic level
Input impedance	2.7 kΩ
Open input	Pull-up circuit, optional pull-down circuit
Overvoltage protection	extant
Low-pass	$f_g = 7$ kHz
Special feature	Frequency inputs of the PCAN-MicroMod parallel

Digital/frequency output

Count	1
Maximum frequency	10 kHz (details: see user manual for the PCAN-MicroMod)
Type	Low-side
Voltage proof	< 55 V
Output current	0.75 A (constant current)
Short circuit protection	extant; short-circuit current: 1.2 A

¹ Other sensor type and measuring range on request

CAN	
Transmission standard	High-speed CAN ISO 11898-2, typ. 500 kbit/s, setup with PCAN-MicroMod Configuration (Windows software)
Termination	none
CAN ID reserved for configuration transfer	0x7E7
Module number at delivery (for configuration transfer)	0

Peculiarity Interference Immunity	
Tests	compliant to IEC 61000 and DIN EN 61326
Surge	± 500 V (specification industrial sector: ± 1 kV) ²
Line-conducted HF compatibility	10 V _{eff} (specification: 3 V _{eff})

Environment	
Operating temperature	-40 - +85 °C (-40 - +185 °F)
Temperature for storage and transport	-40 - +100 °C (-40 - +212 °F)
Relative humidity	15 - 90 %, not condensing
Ingress protection (IEC 60529)	IP20
EMC	DIN EN 61326-1:2013-07 EC directive 2004/108/EG

Measures	
Casing size (incl. connectors)	55 x 68 x 24 mm See also dimension drawing in Appendix B on page 23
Weight	109 g

² This specification could only be fulfilled with ± 500 V due to the available space. Therefore, the motherboard should be used with a local power supply.

Appendix A CE Certificate

PCAN-MicroMod Mix 1/2 IPEH-002202/03 – EC Declaration of Conformity
PEAK-System Technik GmbH



Notes on the CE Symbol

The following applies to the "PCAN-MicroMod Mix 1/2" product with the item number(s) IPEH-002202/03.

EC Directive This product fulfills the requirements of EU EMC Directive 2004/108/EC (Electromagnetic Compatibility) and is designed for the following fields of application as for the CE marking:

Electromagnetic Immunity/Emission
DIN EN 61326-1, publication date 2013-07
Electrical equipment for measurement, control and laboratory use – EMC requirements – Part 1: General requirements (IEC 61326-1:2012);
German version EN 61326-1:2013

Declarations of Conformity In accordance with the above mentioned EU directives, the EC declarations of conformity and the associated documentation are held at the disposal of the competent authorities at the address below:

PEAK-System Technik GmbH
Mr. Wilhelm
Otto-Roehm-Strasse 69
64293 Darmstadt
Germany

Phone: +49 (0)6151 8173-20
Fax: +49 (0)6151 8173-29
E-mail: info@peak-system.com

A handwritten signature in black ink, appearing to read "Uwe W. Sch".

Signed this 22nd day of October 2013

Appendix B Dimension Drawing

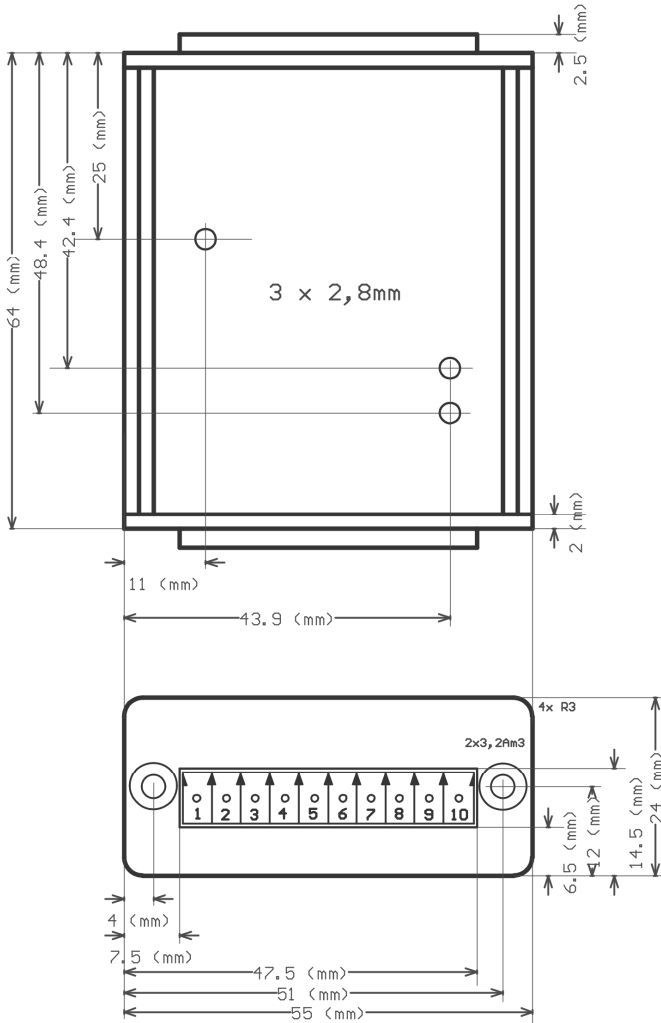


Figure 8: Top view and view of front side with connector. The figure does not show the actual size of the product.